


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		LED CANOPY	

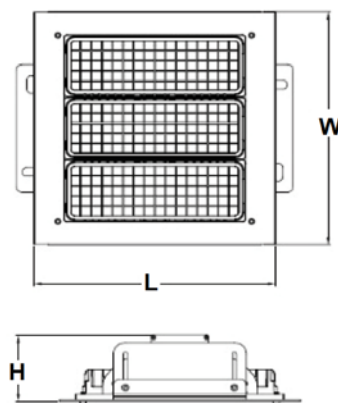

SPECIFICATIONS			HOUSING / DIFFUSER AND LENS		
LED BRAND	:	PHILIPS LUMILEDS	SYMMETRICAL LIGHT DISTRIBUTION ANGLE		
LED POWER	:	150W	MADE FROM DIE-CAST ALUMINIUM WITH POLYESTER POWDER COATE		
SYSTEM POWER	:	165W	BRASS CABLE GRAND (WATER DUST PROOF)		
DRIVER	:	MEANWELL	KNOT AND SCREW MADE FORM 304 STAINLESS STEEL		
OPERATING VOLTAGE	:	100-305VAC, 50-60Hz	PROTECTION		
OPERATING TEMP	:	-40°C ~ +40°C			
POWER FACTOR	:	>0.9	INGRESS PROTECTION IP65		
LUMINOUS FLUX	:	19,000 lm	SURGE PROTECTION DEVICE 4KV (LINE-EARTH)		
LED LUMINOUS EFFICIENCY	:	190 lm/W	ELECTRICAL INSULATION CLASS I		
CRI	:	RA>70	INSTALLATION		
COLOR TEMPERATURE	:	4,000K, 5,000K, 6,500K			
LIFESPAN	:	50,000 HOURS	SURFACE MOUNTED		
BEAM ANGLE	:	30°, 60°, 90°	STANDARD		
	:	30° × 100°, 40° × 140°			
MODEL			REMARK		
DLED-CP145-5150L	150W	LED	W	L	H
			400	408	114