


SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		120W LED HIGHBAY	

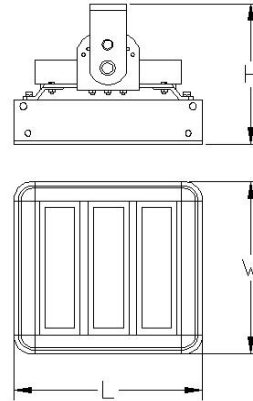

SPECIFICATIONS		HOUSING
OPERATING VOLTAGE	: 90-305VAC, 50-60Hz	MADE FROM HIGH GRADE ANODIZED ALUMINIUM.
LED POWER	: 120W	STAINLESS STEEL FASTENER , HEAT ZINC-PLATED STANCE
OPERATING TEMPERATURE	: -40°C TO +50°C	FOR AIMMING DIRECTION.
OPERATING HUMIDITY	: 10% TO 90%	
POWER FACTOR (PF)	: >0.95	DIFFUSER AND LENS
DRIVER EFFICIENCY	: >92%	EXQUISITE DESIGN WITH POWERFUL THERMAL OUTPUT
MAINTAIN LUMINOUS FLUX	: 15,600lm	,WITH MORE RELIABLE WATERPROOF PERFORMANCE.
LED LUMINOUS EFFICIENCY	: 130lm/w	
LIFESPAN	: 62,000 HOURS - L70, @25°C	INSTALLATION
CRI	: Ra>78	SURFACE MOUNT , PENDANT MOUNT OR CABLE MOUNT
BEAM ANGLE	: 90x100°	
CCT	: 3,500K - 6,500K	STANDARD
IP RATING	: IP65 (IP67 OPTIONAL)	TIS.1955-2551
NET WEIGHT	: 6.20Kg.	ISO 9001 : 2008

MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLED-HB57-4014	120 W.	LED	303	311	196	