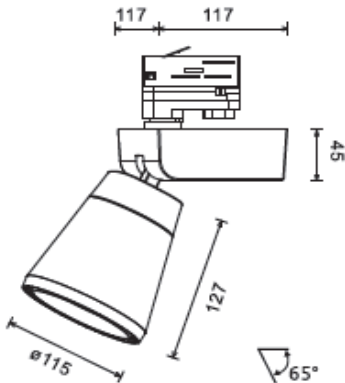


Saengmitr GROUP ISO 9001 : 2015		Products Data Sheet		DELIGHT ®		
SYMBOL		TYPE	PRODUCT NAME		CONTACT NAME / NUMBER	
			LED TRACK SPOTLIGHT			
 						
SPECIFICATIONS			DESCRIPTION			
INPUT VOLTAGE : 220-240VAC			MADE FROM HOUSING DIE-CAST ALUMINUM.			
LED POWER : 25 W			REFLECTOR ALUMINUM ANODIZED SPECULAR SILVER.			
SYSTEM POWER : 28 W			HEAT SINK ALUMINUM ANODIZED COATING.			
OPERATING TEMPERATURE RANGE : -20 TO +40 °C			GEAR BOX DIE-CAST ALUMINUM			
LED TYPE : LED COB						
LUMEN FLUX : 2400-2500lm						
EFFICIENCY (lm/W) : 96-100 lm/W						
COLOR TEMPERATURE : 3,000-4,000K			INSTALLATION			
COLOUR RENDERING INDEX (CRI) : >80			MOUNTED WITH TRACK RAIL			
BEAM ANGLE : 12 °/30 °/45 °/60 °						
LED LIFETIME : 30,000 HOURS AT 25 °C			STANDARD			
			TIS. 1955-2551			
MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLED-TR204-5154	25W	LED	Ø115	-	127	