
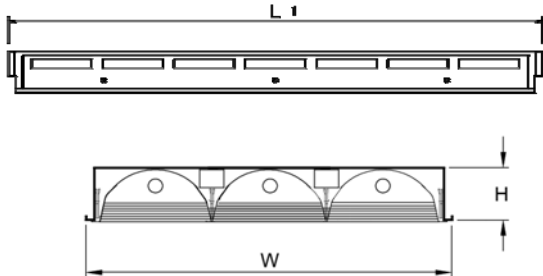


<div>Saengmitr</div> <div>GROUP</div> <div>ISO 9001 : 2015</div>		Products Data Sheet			<div>DELIGHT®</div>		
SYMBOL		TYPE	PRODUCT NAME			CONTACT NAME / NUMBER	
			FLUORESCENT (Profile Louver with Air-Slot				
<div><div></div><div></div></div>							
HOUSING					WIRING CABLE		
<div>MADE FROM HIGH GRADE COLD ROLLED STEEL SHEET.</div> <div>SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLTESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .</div> <div>SUPPLY WITH DOUBLE SIDES SLOT EXTRUDED ALUMINIUM OF FUNCTION</div> <div><input type="checkbox"/> BOTH SUPPLY AIR <input type="checkbox"/> BOTH RETURN AIR</div> <div><input type="checkbox"/> SUPPLY AIR AND RETURN AIR AT EACH SIDE</div> <div>THICKNESS <input type="checkbox"/> 0.6 mm , <input type="checkbox"/> 0.8 mm</div>					<div>THW 1x1.0 SQ.MM. 70 °C</div> <div>WIRING CABLE (STANDARD)</div>		
LOUVER					DIFFUSER		
<div>MADE FROM 99.85% PURITY ANODIZED ALUMINIUM , PARABOLIC LOUVER FOR LONGITUDINAL AND CHRISMAS TREE PROFILES FOR TRANSVERSAL TO ANTI-GLARE .</div>					NONE		
REFLECTOR					LAMP AND HOLDER		
<div>MADE FROM 99.85% PURITY ANODIZED ALUMINIUM WITH MIRROR FINISHED</div> <div><input type="checkbox"/> 87% AND <input type="checkbox"/> 95% TOTAL REFLECTANCE</div>					G13 ROTARY LOCK TYPE LAMP HOLDER		
STANDARD					INSTALLATION		
<div>TIS.902 เล่ม 2 (2) - 2557 WITH CLASS I AND F MARK</div> <div>TIS.1955-2551</div>					RECESSED T-BAR CEILING MOUNTED		
MODEL	LAMP		DIMENSION (mm.)			REMARK	
	WATT	TYPE	W	L	H		
DLL3T/G-340	3x18W	LED TUBE	595	1195	85	CUTOUT 565x1175mm.	