



SYMBOL	TYPE	PRODUCT NAME	CONTACT NAME / NUMBER
		FLUORESCENT (Asymmetrical Batten Type)	

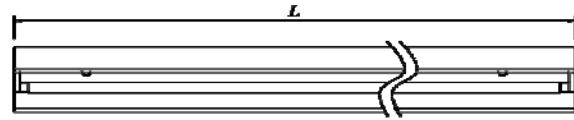

HOUSING			WIRING CABLE			
<p>MADE FROM HIGH GRADE COLD ROLLED STEEL SHEET.</p> <p>SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLTESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .</p> <p>THICKNESS <input type="checkbox"/> 0.6 mm , <input type="checkbox"/> 0.8 mm</p>			<p>THW 1x1.0 SQ.MM. 70 °C</p> <p>WIRING CABLE (STANDARD)</p>			
LOUVER			DIFFUSER			
NONE			NONE			
REFLECTOR			LAMP AND HOLDER			
<p>MADE FROM HIGH GRADE COLD ROLLED STEEL SHEET.</p> <p>SIX-STAGES ZINC-PHOSPHATE PRE-TREATMENT FOR RUST RESISTANT , FINISHED WITH WHITE POLTESTER POWDER BY ELECTROSTATIC METHOD TWO STAGES AND BAKED ENAMEL .</p>			<p>G13 ROTARY LOCK OR SPRING LOADED</p> <p>TYPE LAMP HOLDER</p>			
STANDARD			INSTALLATION			
<p>TIS.902 ๓๕๓2 (1) - 2557 WITH CLASS I AND F MARK</p> <p>TIS.1955-2551</p>			SURFACE MOUNTED			
MODEL	LAMP		DIMENSION (mm.)			REMARK
	WATT	TYPE	W	L	H	
DLB5-140	1x18W	LED TUBE	53	1245	100	